

# Graze® Single-handle semi-professional kitchen sink faucet K-22060

# Features

- Semi-professional kitchen faucet with finish-matched easy-clean hose cover.
- Switch-Grip<sup>™</sup> sprayhead rotates in 90 degree increments. Face buttons in the direction you prefer.
- Three-function pull-down sprayhead with touch-control allows you to switch between stream, Sweep<sup>®</sup> spray and BerrySoft<sup>®</sup> spray.
- Sweep<sup>®</sup> spray features specially angled nozzles that form a wide, powerful blade of water to sweep your dishes and sink clean.
- Unique three-function sprayhead allows you to tackle tasks such as cleaning, rinsing and filling with Sweep<sup>®</sup> Spray, BerrySoft<sup>®</sup> spray, and aerated stream.
- DockNetik<sup>®</sup> magnetic docking system securely locks the sprayhead into place when not in use.
- 24" high-arch 360° rotating swing spout offers vertical clearance for tall cookware and pitchers.
- 10" (254 mm) swing spout reach.
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar).
- Single lever handle makes adjusting water temperature easy.
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage.
- MasterClean<sup>™</sup> sprayface features an easy-to-clean surface that withstands mineral buildup.
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.

# Material

- Premium metal construction for durability and reliability.
- KOHLER finishes resist corrosion and tarnishing.

# Installation

- Deck-mount.
- Single-hole installation (3-hole escutcheon sold separately).
- Flexible supply lines simplify installation.

# Adapters, Rough-in and Extension Kits

1327990 Range: 2-1/2" (64 mm) - 2-5/8" (67 mm)

# **Optional Products/Accessories**

K-22071 Three-hole kitchen faucet escutcheon



ADA CSA B651

Codes/Standards ASME A112.18.1/CSA B125.1 NSF/ANSI 61 NSF/ANSI 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651

# KOHLER<sup>®</sup> Faucet Lifetime Limited Warranty

See website for detailed warranty information.

# **Available Colors/Finishes**

Color tiles intended for reference only.


#### Color Code Description

CP Polished Chrome VS Vibrant® Stainless BL Matte Black 2MB Vibrant® Brushed Moderne Brass

THE BOLD LOOK

# Graze®

Single-handle semi-professional kitchen sink faucet K-22060

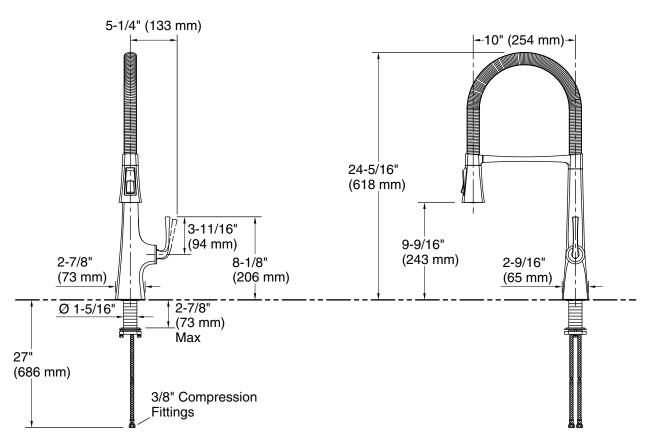

# **Technical Information**

All product dimensions are nominal.

**KOHLER**, Faucets

#### Faucet:

Flow rate:	1.5 gal/min (5.7 l/min)
Pressure:	60 psi (4.1 bar)
Drain included:	No

#### Spout:

Spout reach: 10" (254 mm) Handle clearance: 5-1/4" (133 mm)

#### Notes

Install this product according to the installation instructions.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

